

Sis



CONNECTINGS



SYMBOLS AND FINISHES LEGEND

SYMBOLS



= SHELF SAFELY LOCKED DURING TRANSPORTATION AND AT HOME.



= ANTI-TURNOVER LOCKING SYSTEM



= NORMS / PATENTS



= PHILLIPS / POZIDRIV



= WITH BUFFER



= PART NO.



= BLADE SLOT

= COMBI SLOT



= WITH MAGNET



= PCS. PER PACKAGE





= NEWTON



= CAPACITY LOADING



= HEXALOBULAR SOCKET

= HEXAGONAL SOCKET



= FRICTION



= WOOD / GLASS **THICKNESS**



= COUNTERSUNK HEAD



= AUTOMATIC



= HOLE DIAMETER



= PAN HEAD



= DROP DOWN



= DIAMETER



= FLANGE HEAD



= FLAT HEAD



= STANDARD HINGE



= HEIGHT

= LENGTH



= TRILOBULAR SCREW



= KIMANA HINGE



= RIGHT VERSION



= SELF-TAPPING SCREW



= FLAP HINGE



= LEFT VERSION



= EURO THREAD



= WITH SPRING



= SETTING CODE



= METRIC THREAD



= WITHOUT SPRING



= PCS. PER PAD



= PRE-INSERTED SCREW



= REVERSED SPRING



= CUT ON REQUEST



= PRE-INSERTED SCREW AND SPREADING BUSH




= SELF ADHESIVE



= WITH FLANGE

NOTE: Printing errors and omissions may exist despite our best efforts to ensure accurancy. We reserve the right to alter specifications without notice.

MATERIALS





HSS = High Speed Steel

 $\left(\mathsf{BR}\right)$ = Brass

ABS = Acrylonitrile Butadiene Styrene

ZAnk = Nickel-plated Zinc Alloy

STzk = Zinc-plated Steel

 $\left(AL \right) = Aluminium$

(WD) = Wood

EVA) = Ethylene Vinyl Acetate



+ EP = other engineering plastic available on request

SR = SOFT RUBBER

+ SR = other soft rubber available on request

(EPn) = Natural Engineering Plastic

EPc = Clear Engineering Plastic

SRn = Natural Soft Rubber

EPW = White Engineering Plastic

(EPg) = Grey Engineering Plastic

SRW = White Soft Rubber



(SRb) = Black Soft Rubber



FINISHES



= OTHER FINISHES AVAILABLE ON REQUEST

| PART NO. | FINISHES | PART NO. | FINISHES | PART NO. | FINISHES |
|----------|----------------------|----------|--------------------------|----------|------------------------------|
| 00 | Insignificant finish | IF | Middle Grey | UT | T-Met 9007 |
| AA | Natural | IJ | Light Grey | UZ | T-Met |
| AB | White | IL | Grey 20 | WA | Bronzed |
| AE | White 9010 | IN | Grey met. 26 | WI | Burnished |
| EA | Black | JB | Bright Aluminium | XD | Satin-finished Steel |
| EC | Matt Black | JC | Aluminium - Chrome | YA | Nickel-plated |
| EE | Anthracite | JD | Matt Aluminium | YB | Bright Nickel-plated |
| EW | Grey 9007 | JE | Satin-finished Aluminium | YC | Matt Nickel-plated |
| FU | Gunmetal | JF | Aluminium - Brass | YD | Satin-finished Nickel-plated |
| FV | Gunmetal V52 | JG | Aluminium 5 | YQ | Black Nickel |
| GR | Raw | JL | Aluminium PE 11 | Z9 | Black Zinc |
| НА | Brass-Plated | JM | Aluminium RAL 9006 | ZA | Zinc alloy |
| НН | Tropicalized | КА | Chrome | ZN | Zinc-plated |
| HL | Raw Brass | КВ | Bright Chrome | ZQ | Bright Gold |
| нх | Graphite | КС | Matt Chrome | ZY | Titanum |
| IA | Grey | NN | Metallic Beige | ZZ | Clear |
| IB | Metallic Grey | RO | Red | | |





VIS

VIS is the new concept connecting fitting, designed to achieve practical and strong assembling and especially conceived to join bed sides and panels.

VIS can be mounted on relatively thin panels, with a minimum thickness of 18 mm; for panels with a minimum thickness of 25 mm it is possible to add a \varnothing 35 mm cover cap.

Moreover this connecting fitting boasts two different tightening positions: standard (+) and strong (++), which helps in case of inaccurate drillings. It is not necessary to disassemble the whole structure to change the tightening position.


 $\mbox{\sc VIS}$ is made up of a threaded M8 dowel, a special M6 screw and the Ø35mm cylindric joint.








INSTALLATION AND ASSEMBLING

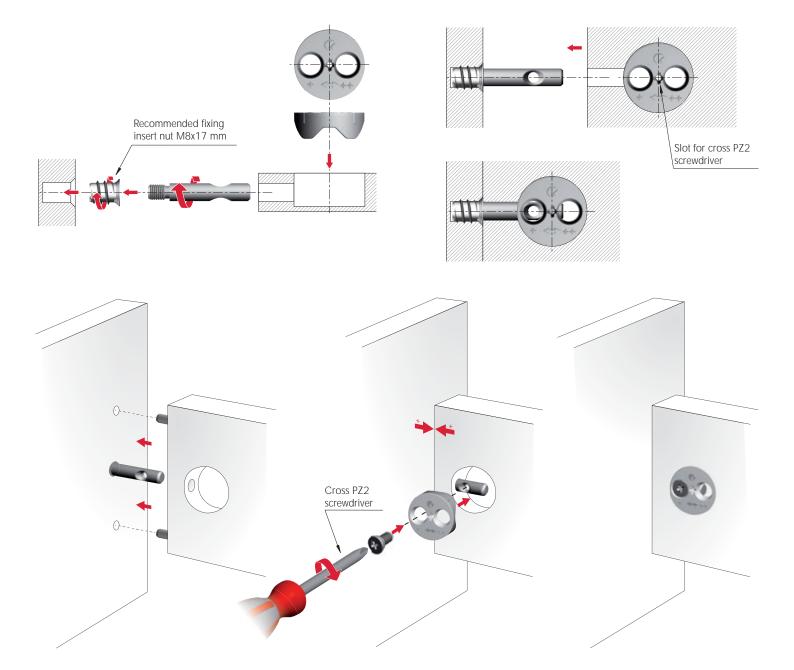







FROM + (minimum) TO ++ (maximum) TIGHTENING

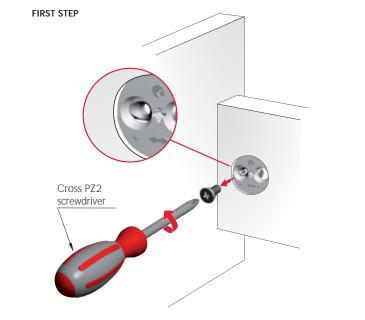

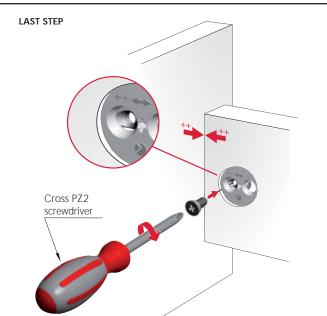



Minimum tightening position (+)

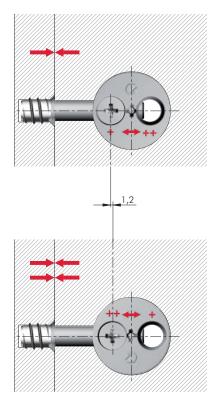


Maximum tightening position (++) = + 1.2 mm

Minimum tightening position (+)

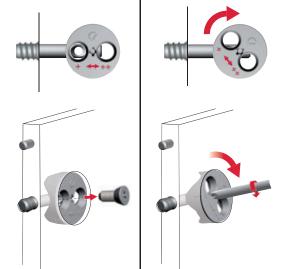










Maximum tightening

position (++)














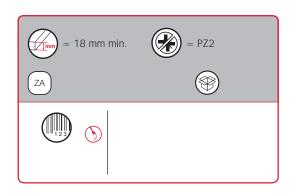




| Α | В | С |
|----|------|-----|
| 18 | 15,5 | 0 |
| 19 | 16,5 | 0,3 |
| 20 | 17,5 | 0,8 |
| 22 | 19 | 1,8 |
| 25 | 20,5 | 3,3 |
| 30 | 23 | 5,8 |



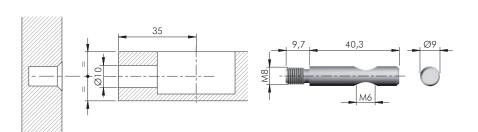


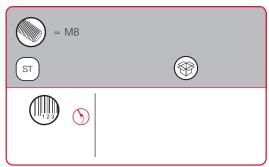








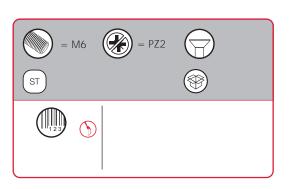






TALIANA ferramenta

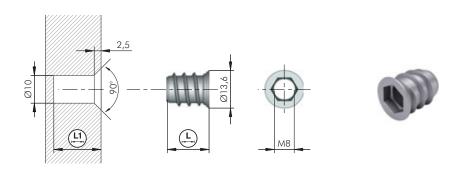

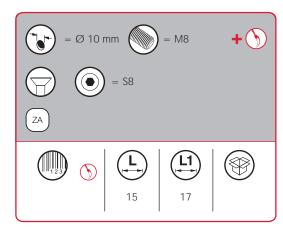

2

